
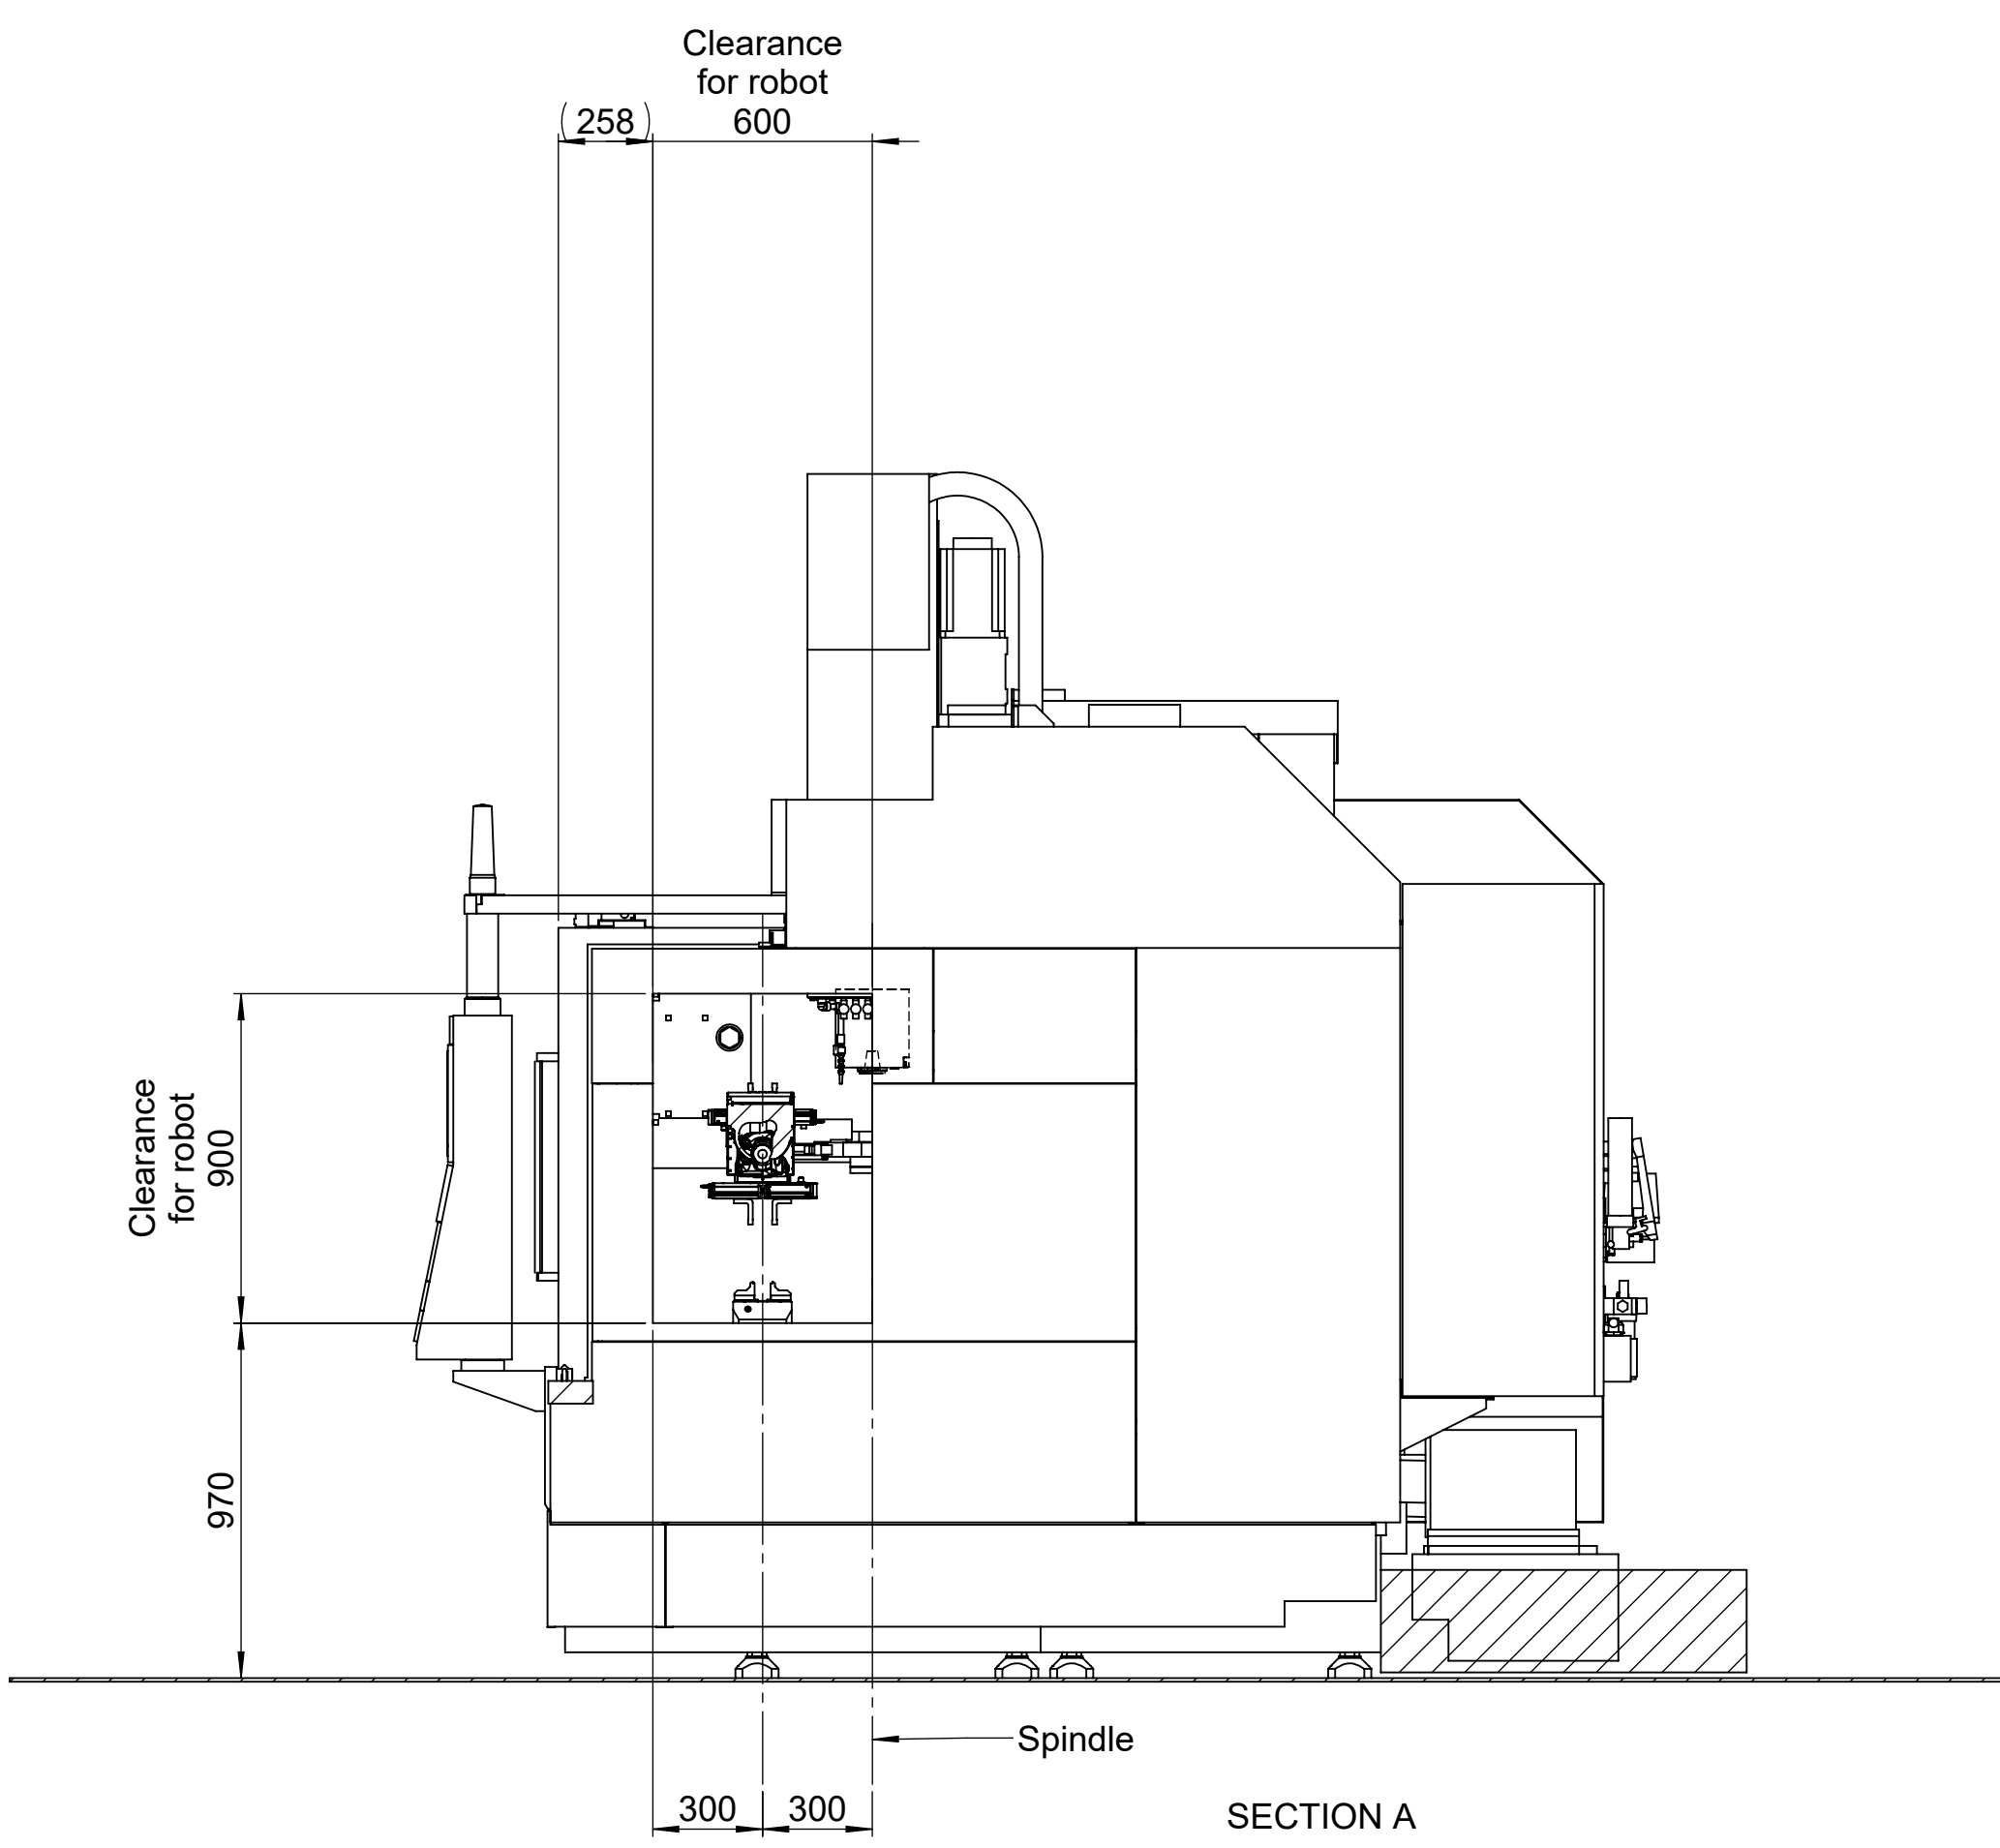
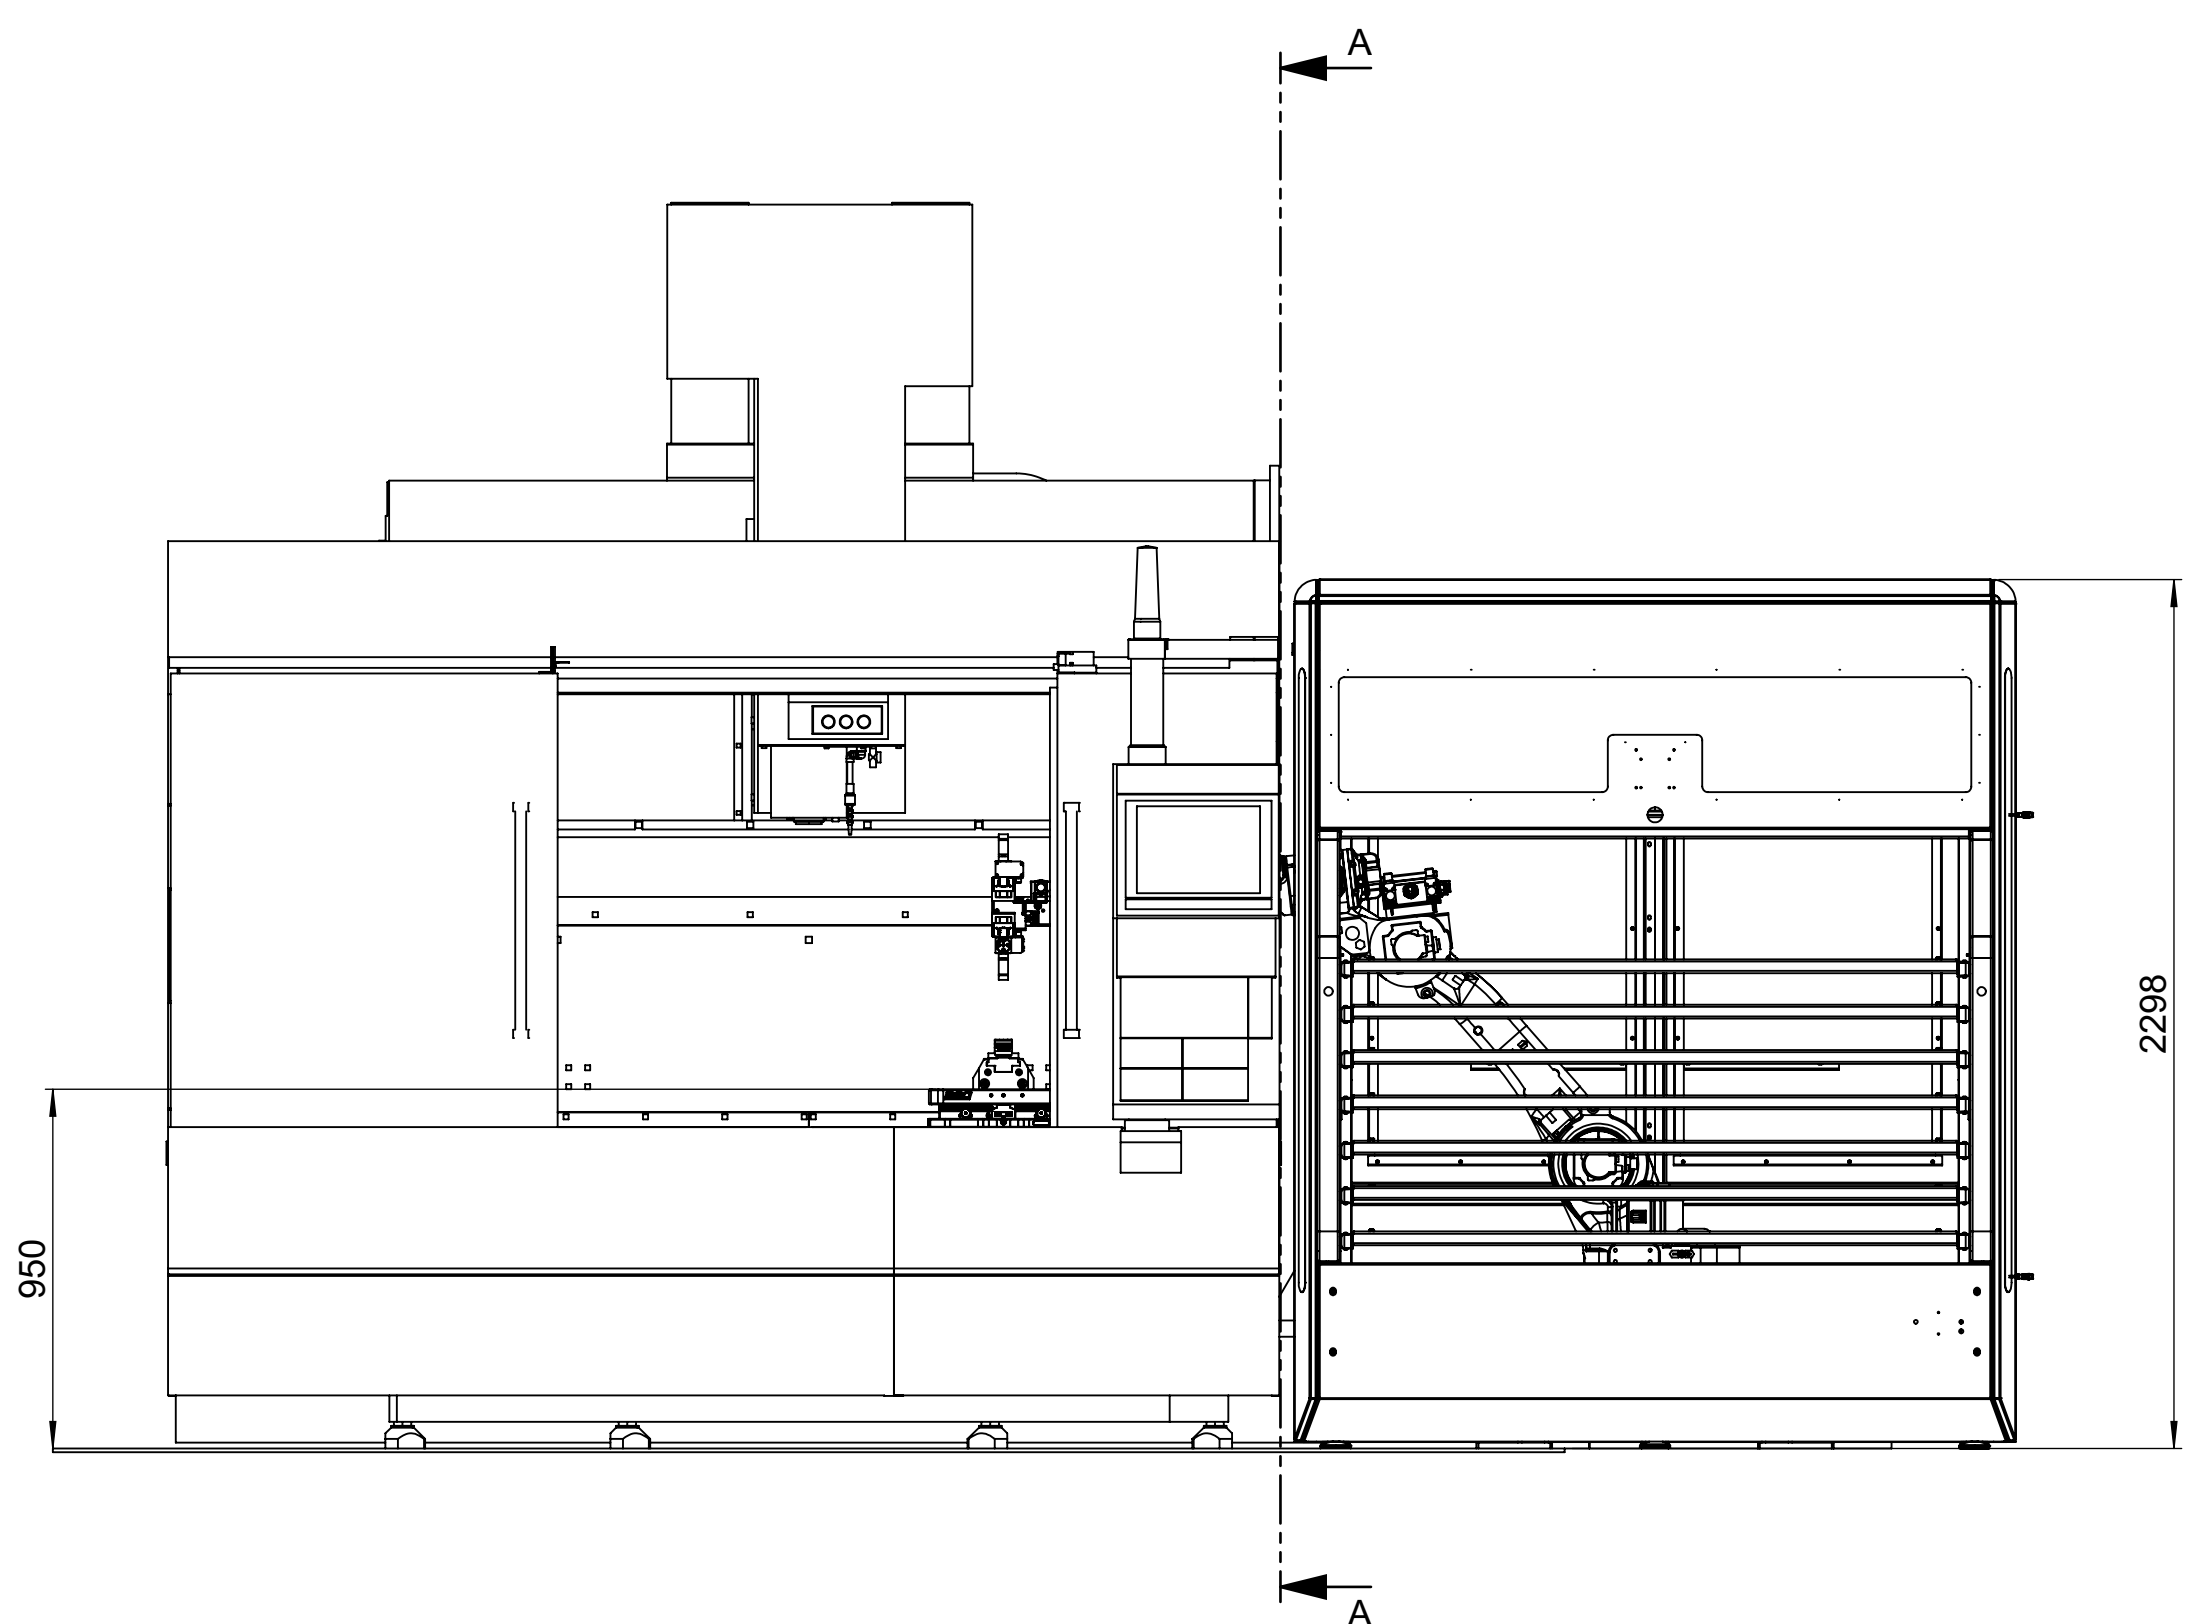


Position of the DX200 is advised, not required.
(When positioning the DX200 to an alternative position, the cable length has to be checked)

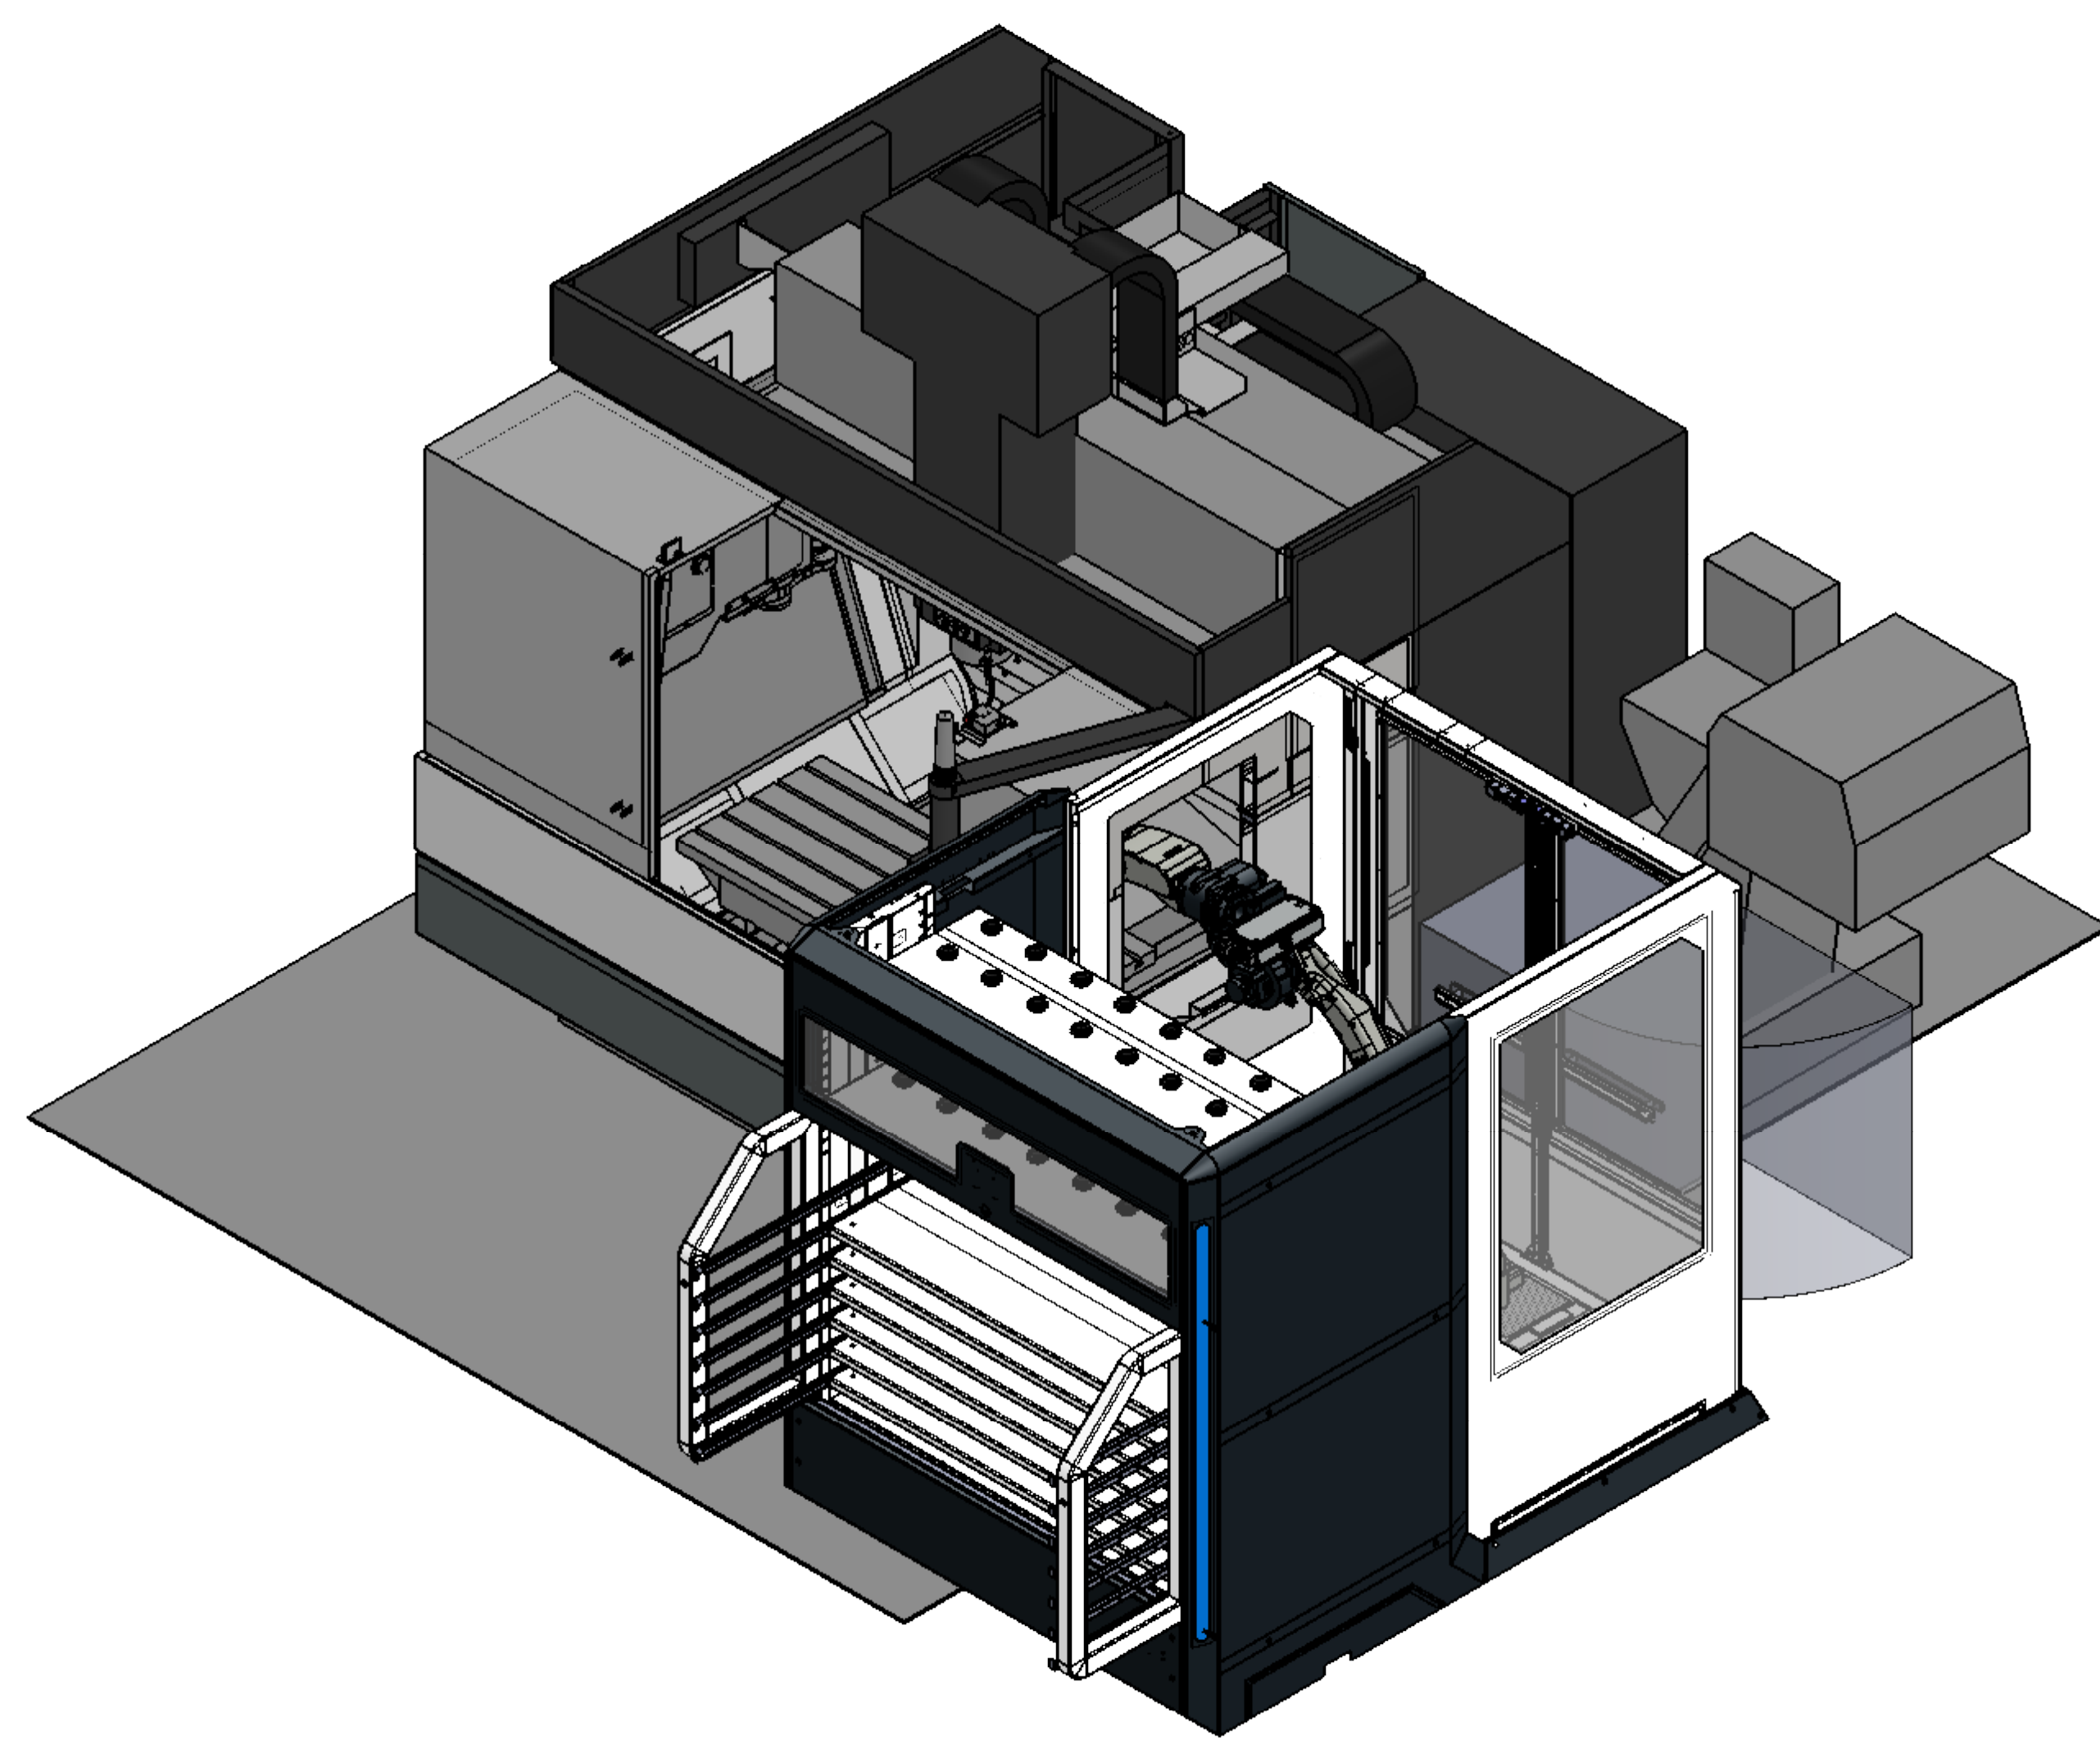

Required connections:

- 3x400V +N 32A-50Hz, with connector CEE-32A-5p.
- The maximum length of the main power cable from the DX200 controller is 5m.
- Required air supply is 7bar. One-touch fitting for tubing Ø8mm.
- Network cable length has to reach the DX200 controller with + 2m overlength.

Description: P124 - Okuma Genos M660V		Drawn: R.C.	Project:
Date: 10-10-2019		Approved:	Sheet No: 1/11
Material: See monchs	Scale: 1:20	Weight: 0,0 kg	Revision: A0
		Universal compliance according to EN-60204-1 and EN-60205-1 Compliance according to EN-60204-1 and EN-60205-1	