REVISIONS				
Rev.	ZONE	Description	Date	Approved

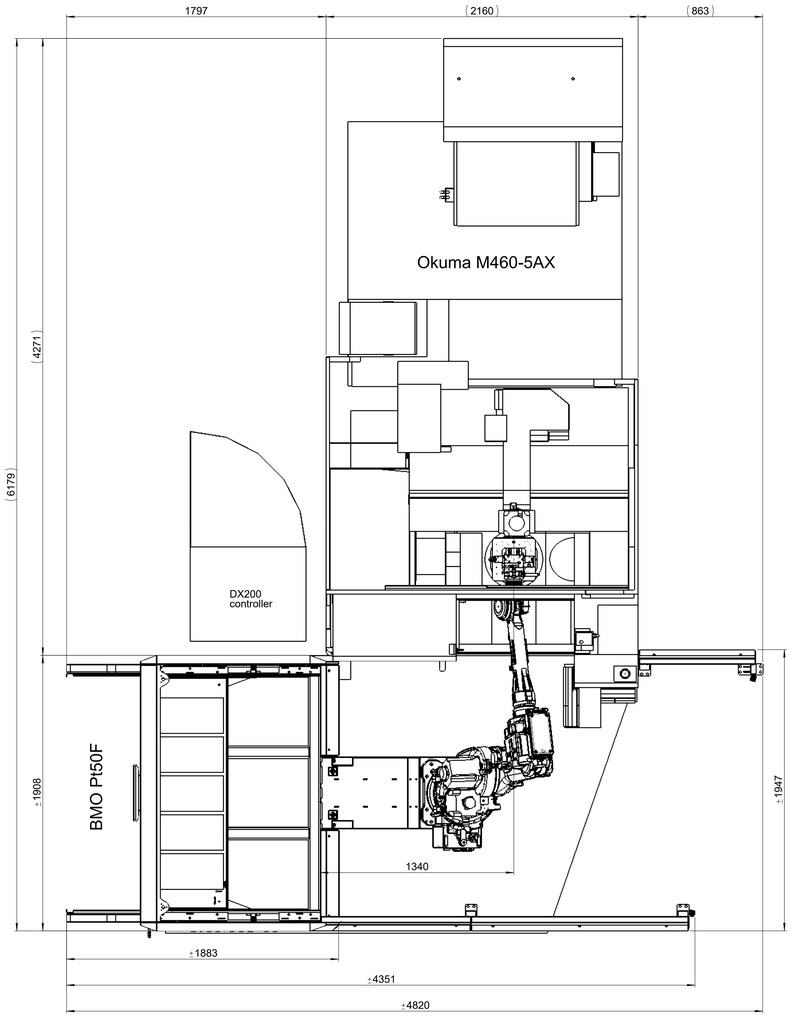

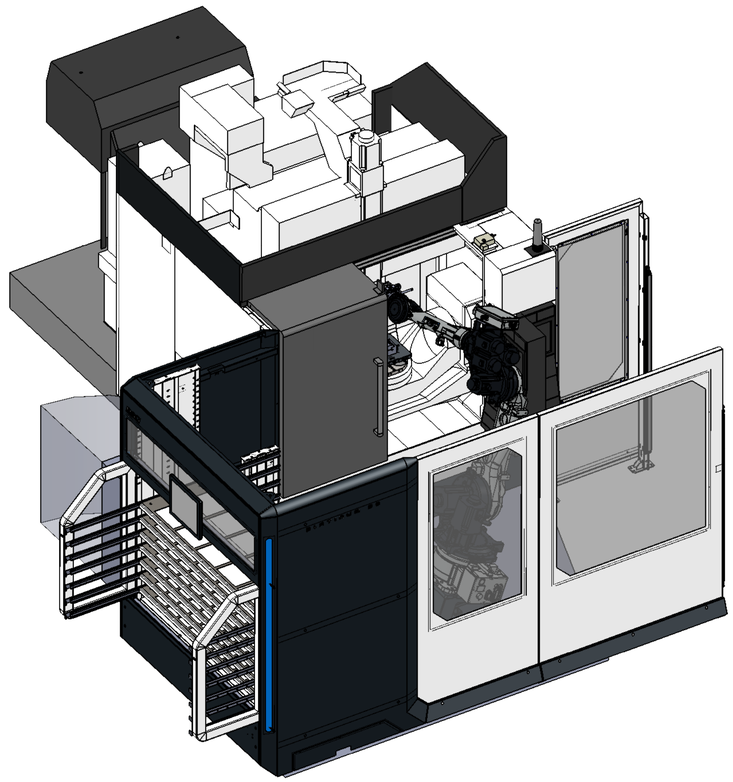

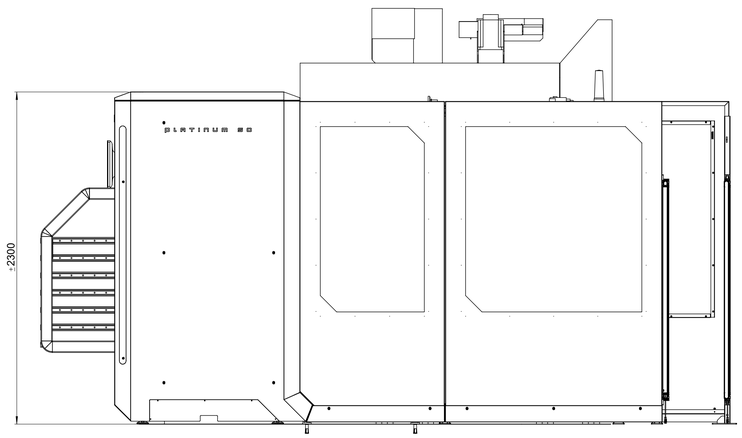

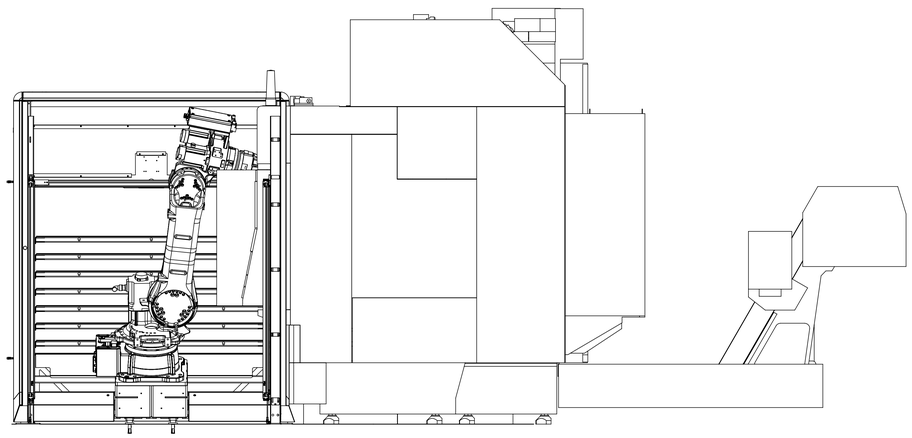

Required connections:

- 3x400V + Zero 32A-50Hz, connected to plug CEE-32A-5 Pole.
- The maximum length of the power cable from the DX200 controller is 5m.
- Compressed air 7 bar. Plug-in coupling for hose Ø8mm.
- Network cable. This must be able to reach the DX200 controller + 2m over-length.

Description: Pt50F - Okuma Genos M460-5AX	Drawn : P.J.	Project :	
	Date : 14-10-2019	American projection	
Material: See mono's	Status :	Weight : 0.0 kg	
Treatment:	Scale : 1:15	Sheet No. : 1/1	
BMO AUTOMATION — BMO Automation, Magneetvormstraat 18, 6221 RV Nederweert, The Netherlands, T : +31 (0) 495 622437, @ info@bmoautomation.nl, www.bmoautomation.nl	Dimensional tolerances according : ISO 2768-mK Roughness according : EN-ISO 1302 Geometrical tolerances according : EN-ISO 1101		A0
	Drawing no. Pt50F-Okuma Genos M460-5AX (left)		Revision