
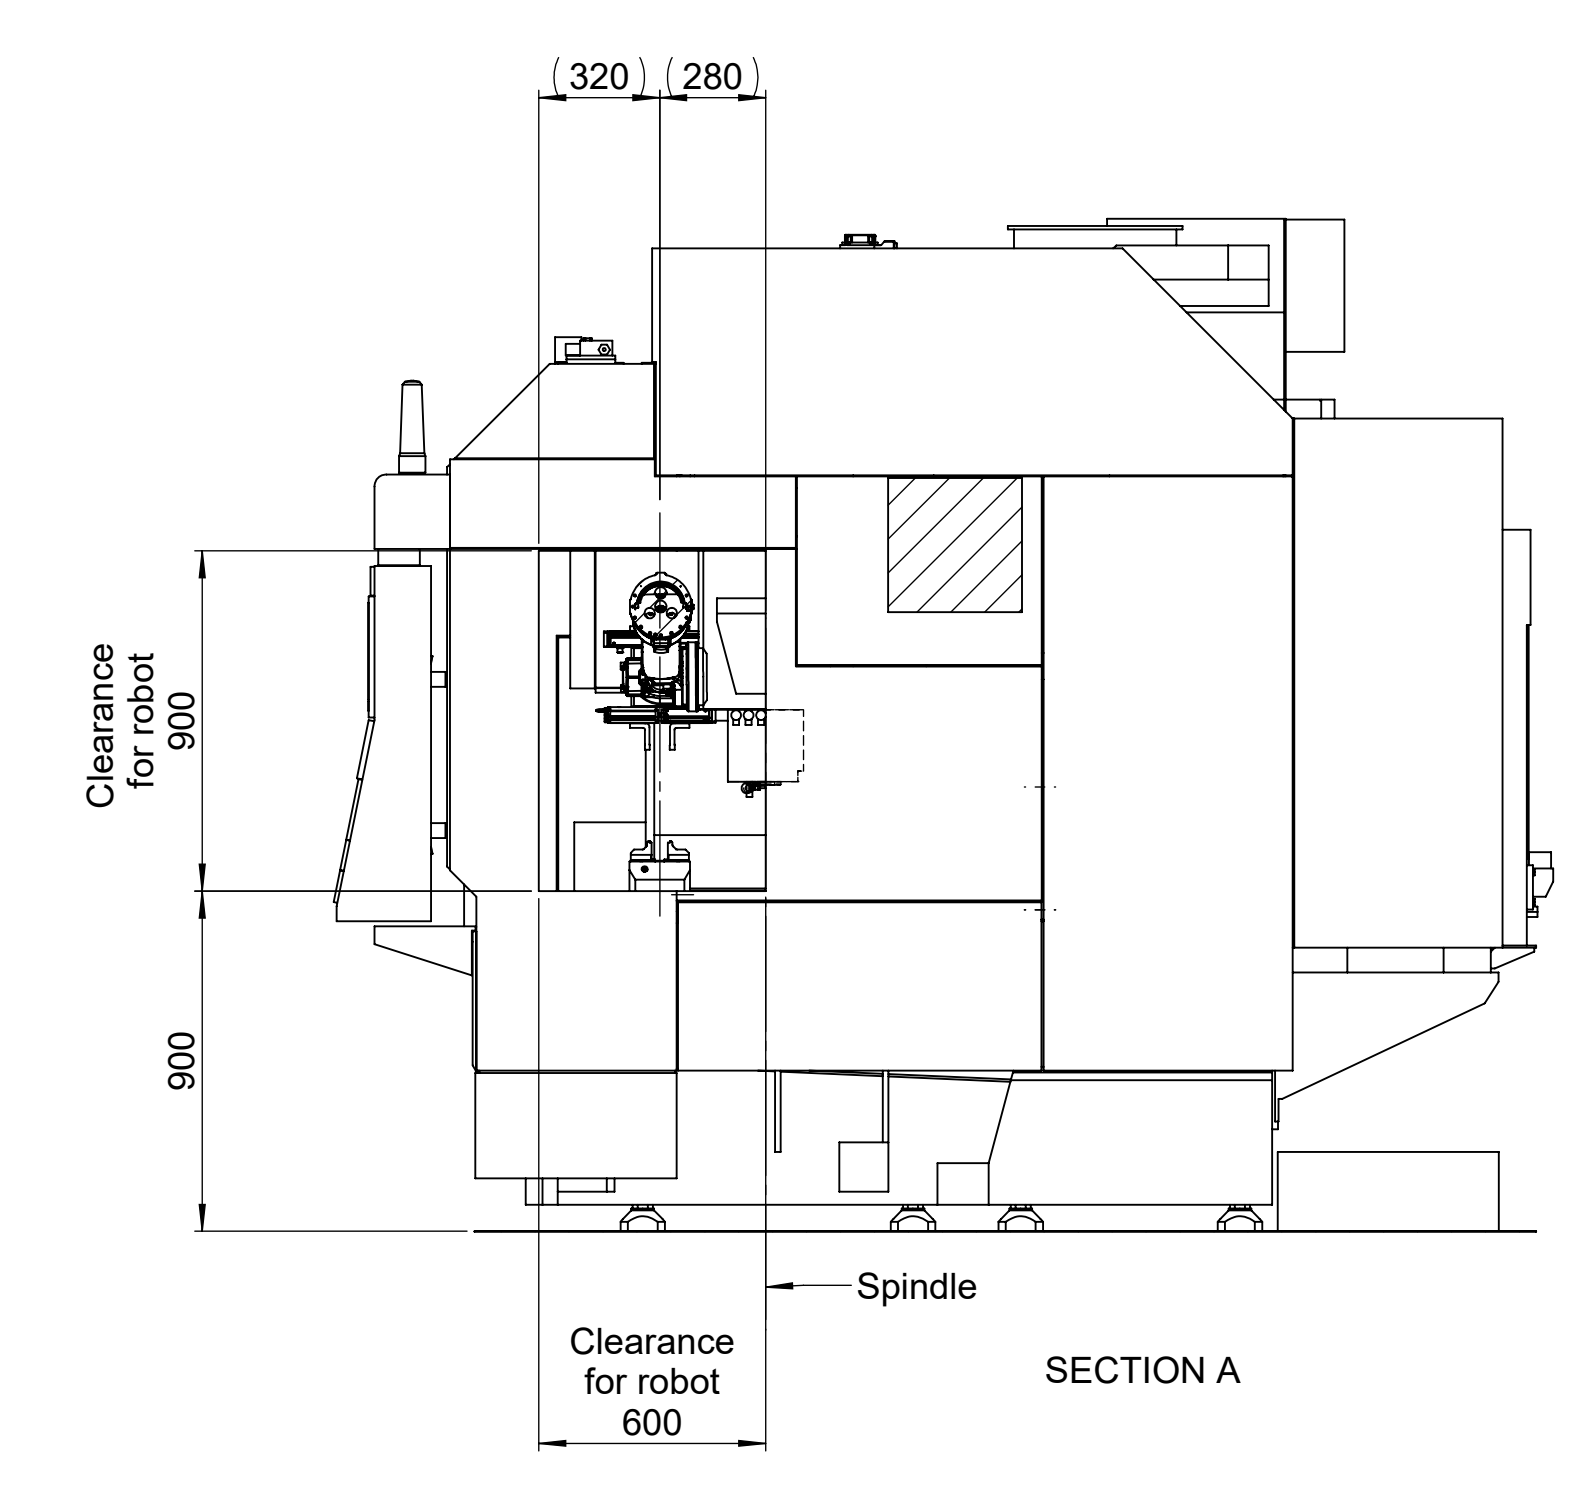
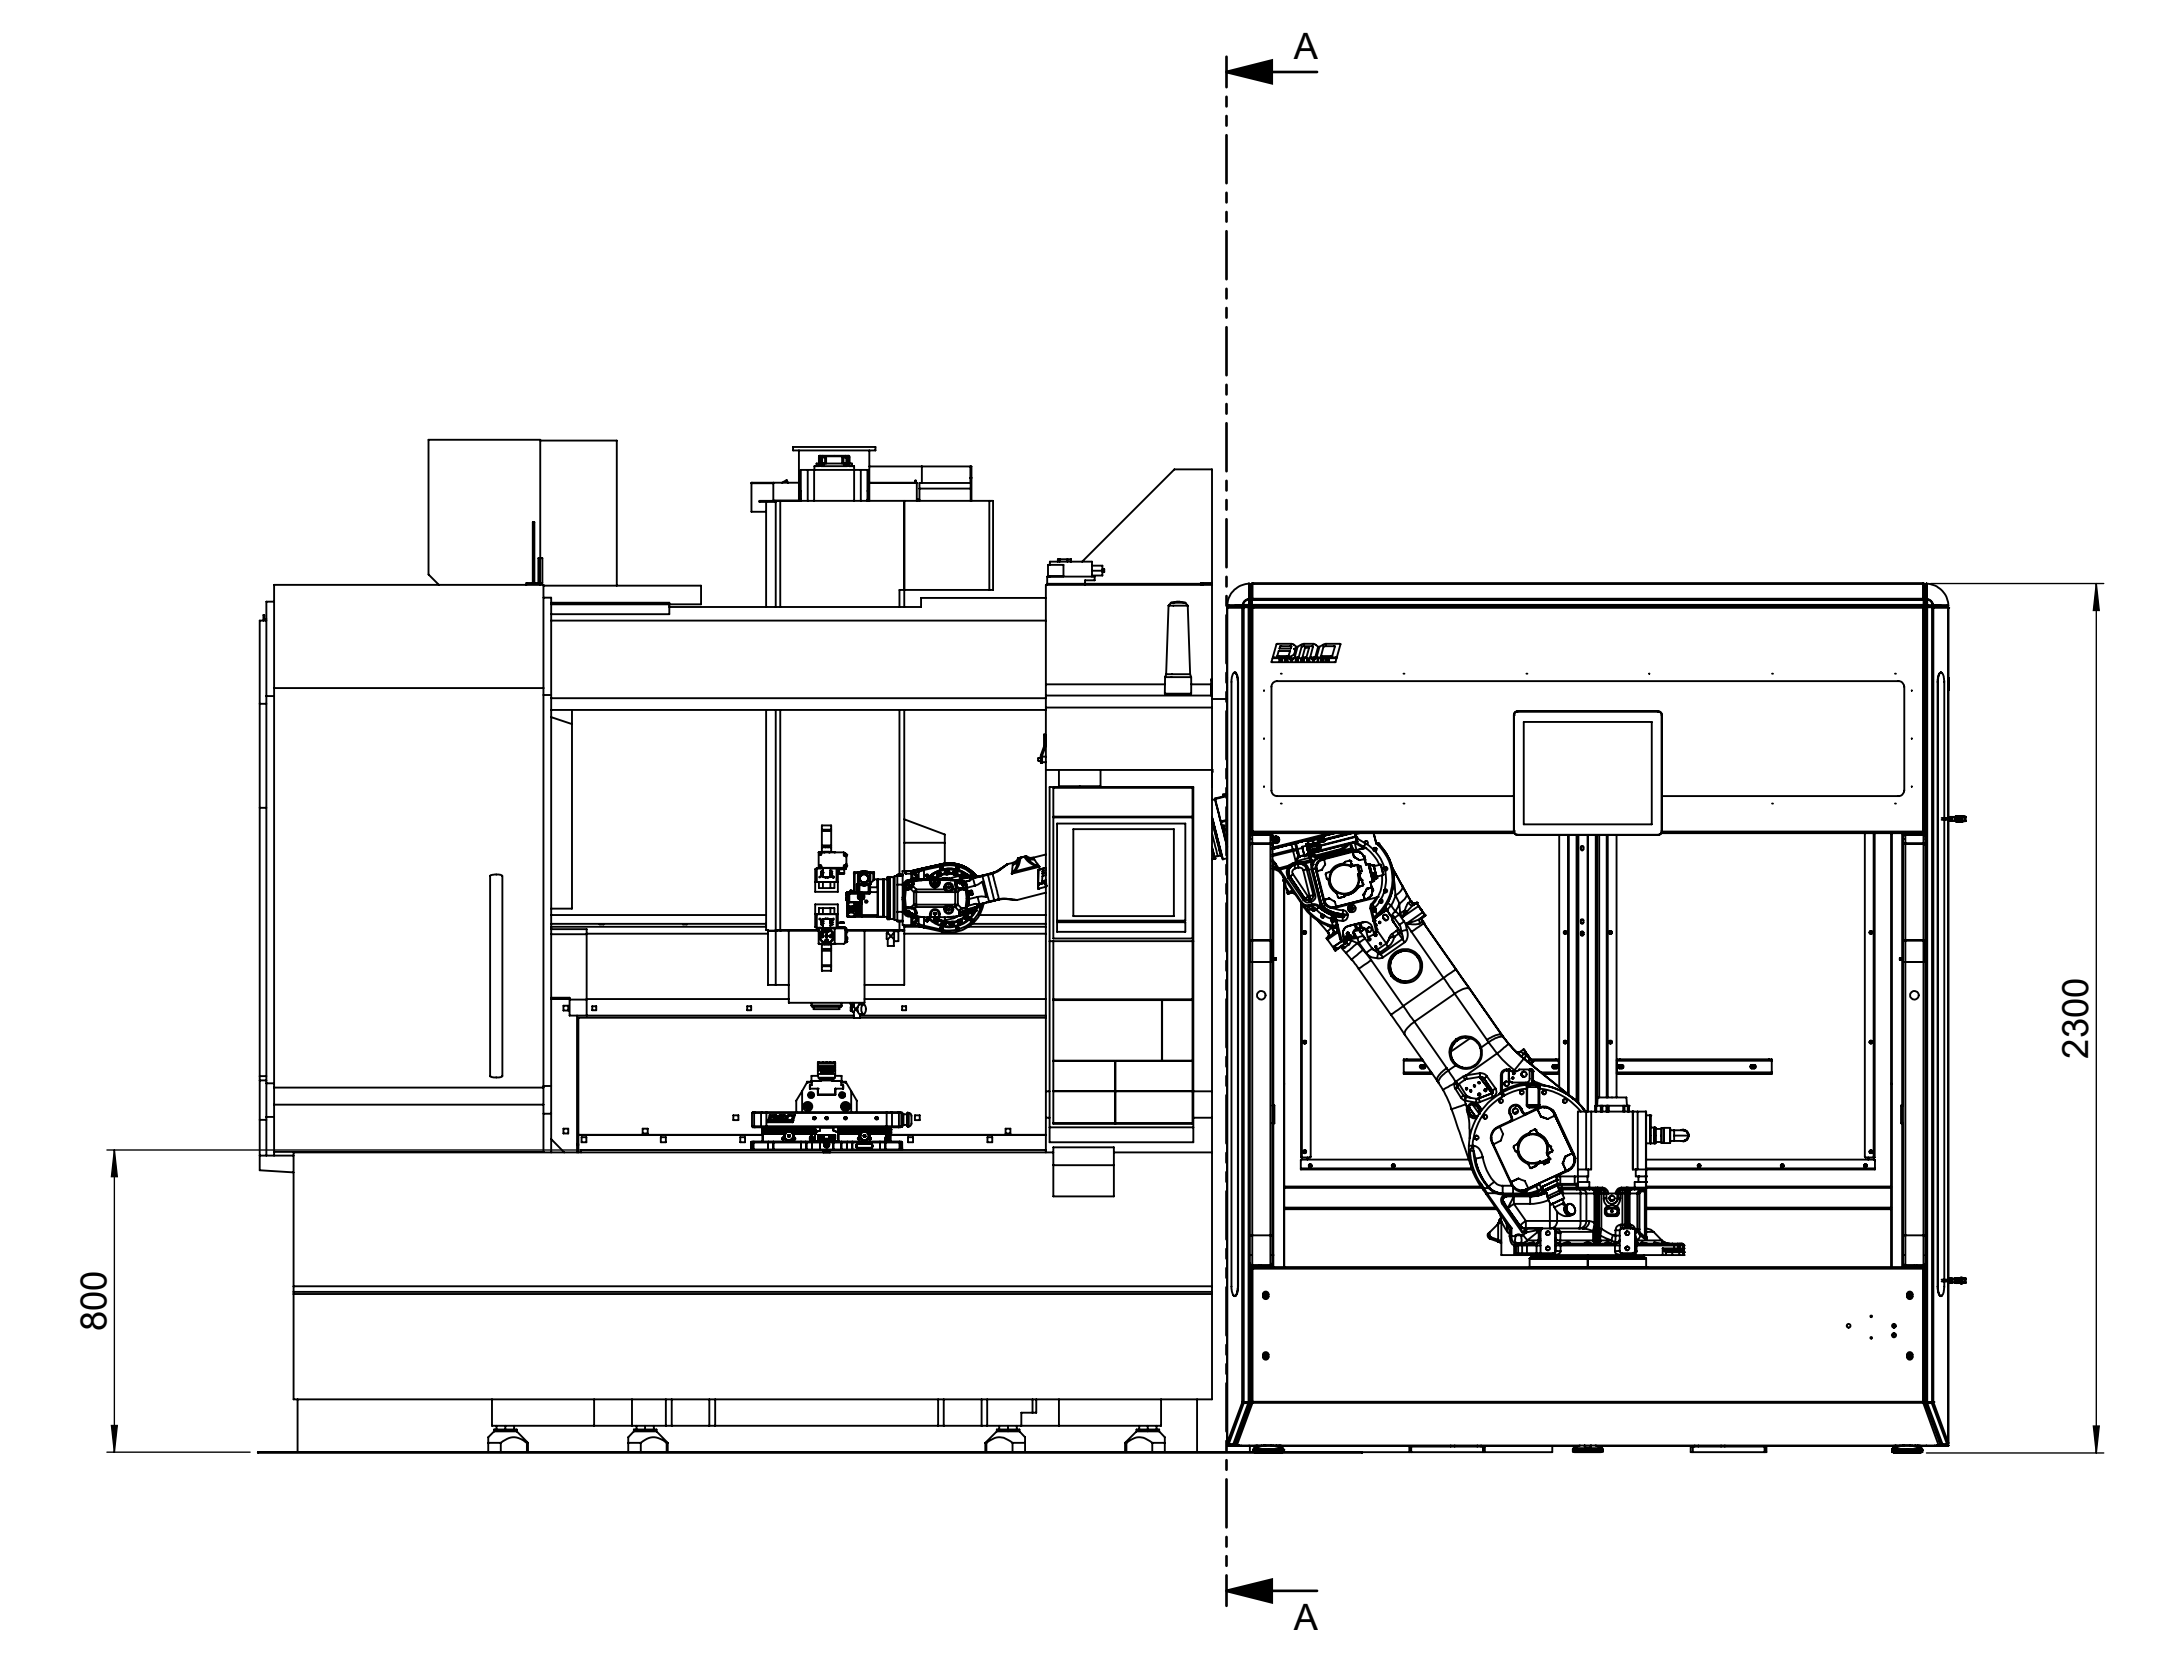


Position of the DX200 is advised, not required.
(When positioning the DX200 to an alternative position, the cable length has to be checked)

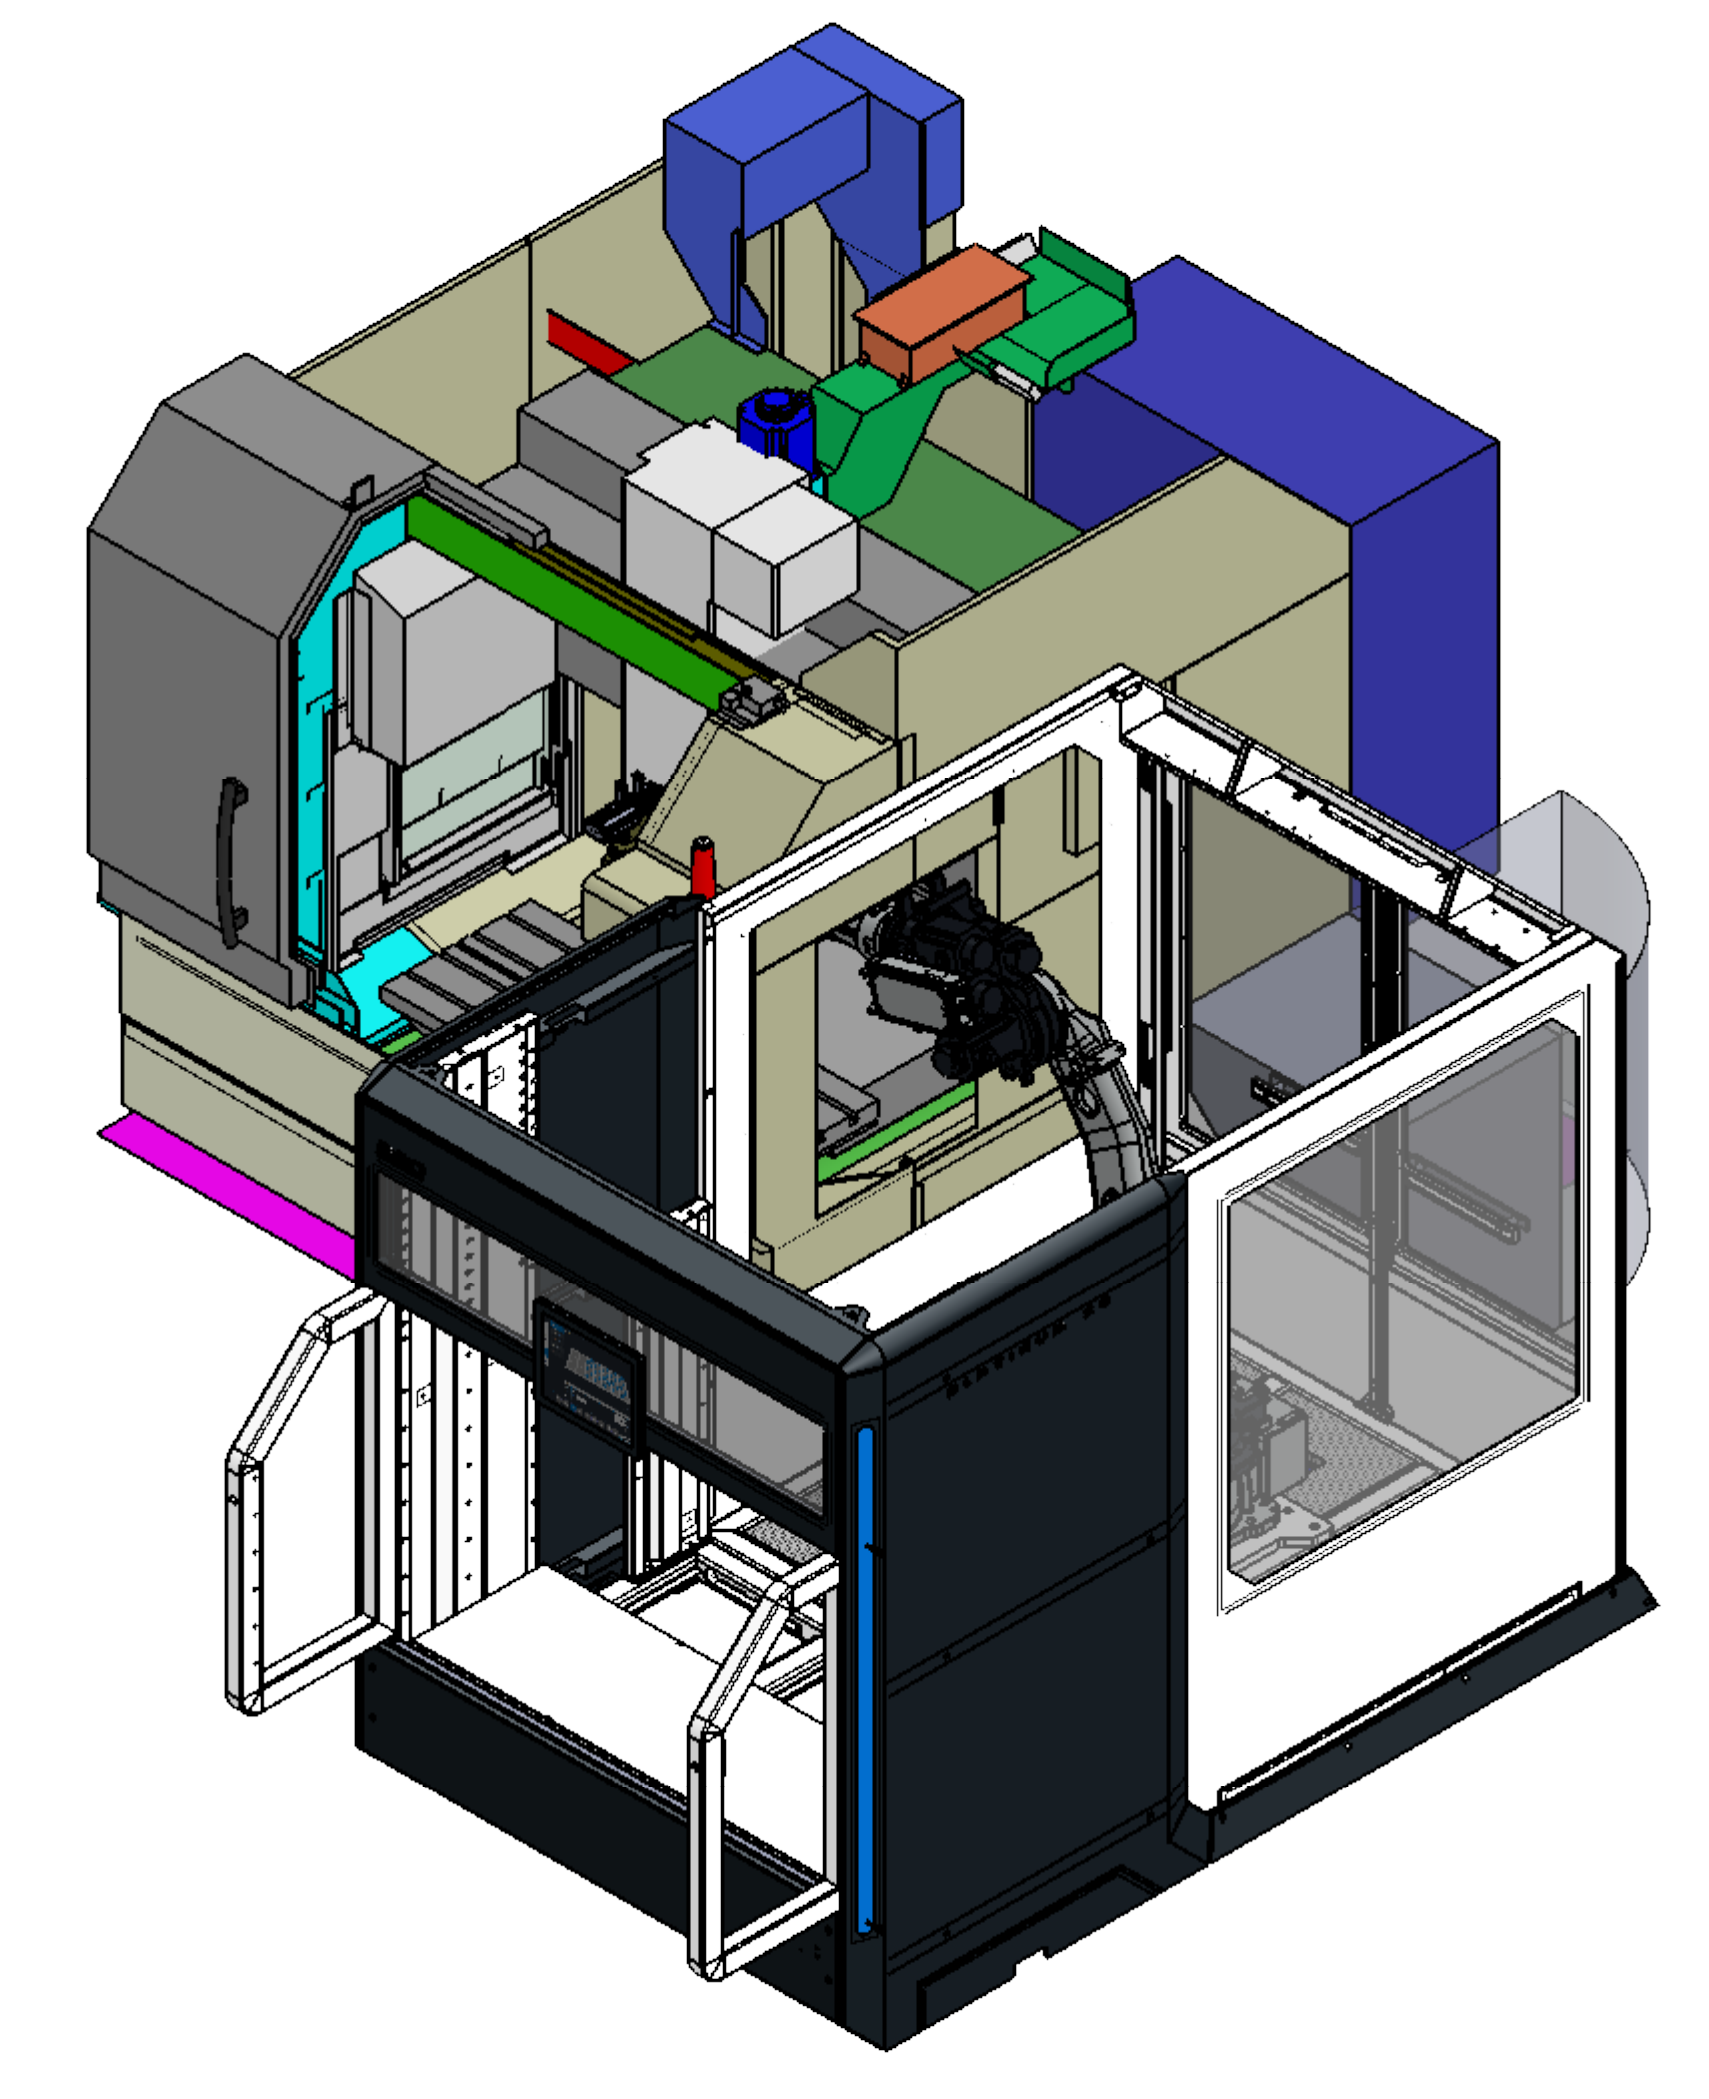

Required connections:

- 3x400V +N 32A-50Hz, with connector CEE-32A-5p.
- The maximum length of the main power cable from the DX200 controller is 5m.
- Required air supply is 7bar. One-touch fitting for tubing Ø8mm.
- Network cable length has to reach the DX200 controller with + 2m overlength.

Description: Pi50 - Okuma Genos M560V		Drawn: R.C.	Project:
Material: See monch	Date: 15-10-2019	Approved: [Signature]	Sheet: 0/0
Treatment:	Scale: 1:20	Weight: 0,0 kg	Sheet No: 1/11
		Universal compliance according to EN 12185-1 Progress according to EN 60204-1 Construction according to EN 60204-1	1502 2788-000 EN-501 1302 EN-ISO 1101
BMO Automation 1-11 01 48 22437 BMO Automation www.bmoautomation.com			Pi50 - Okuma Genos M560V(MB-56V) Revision: A0