
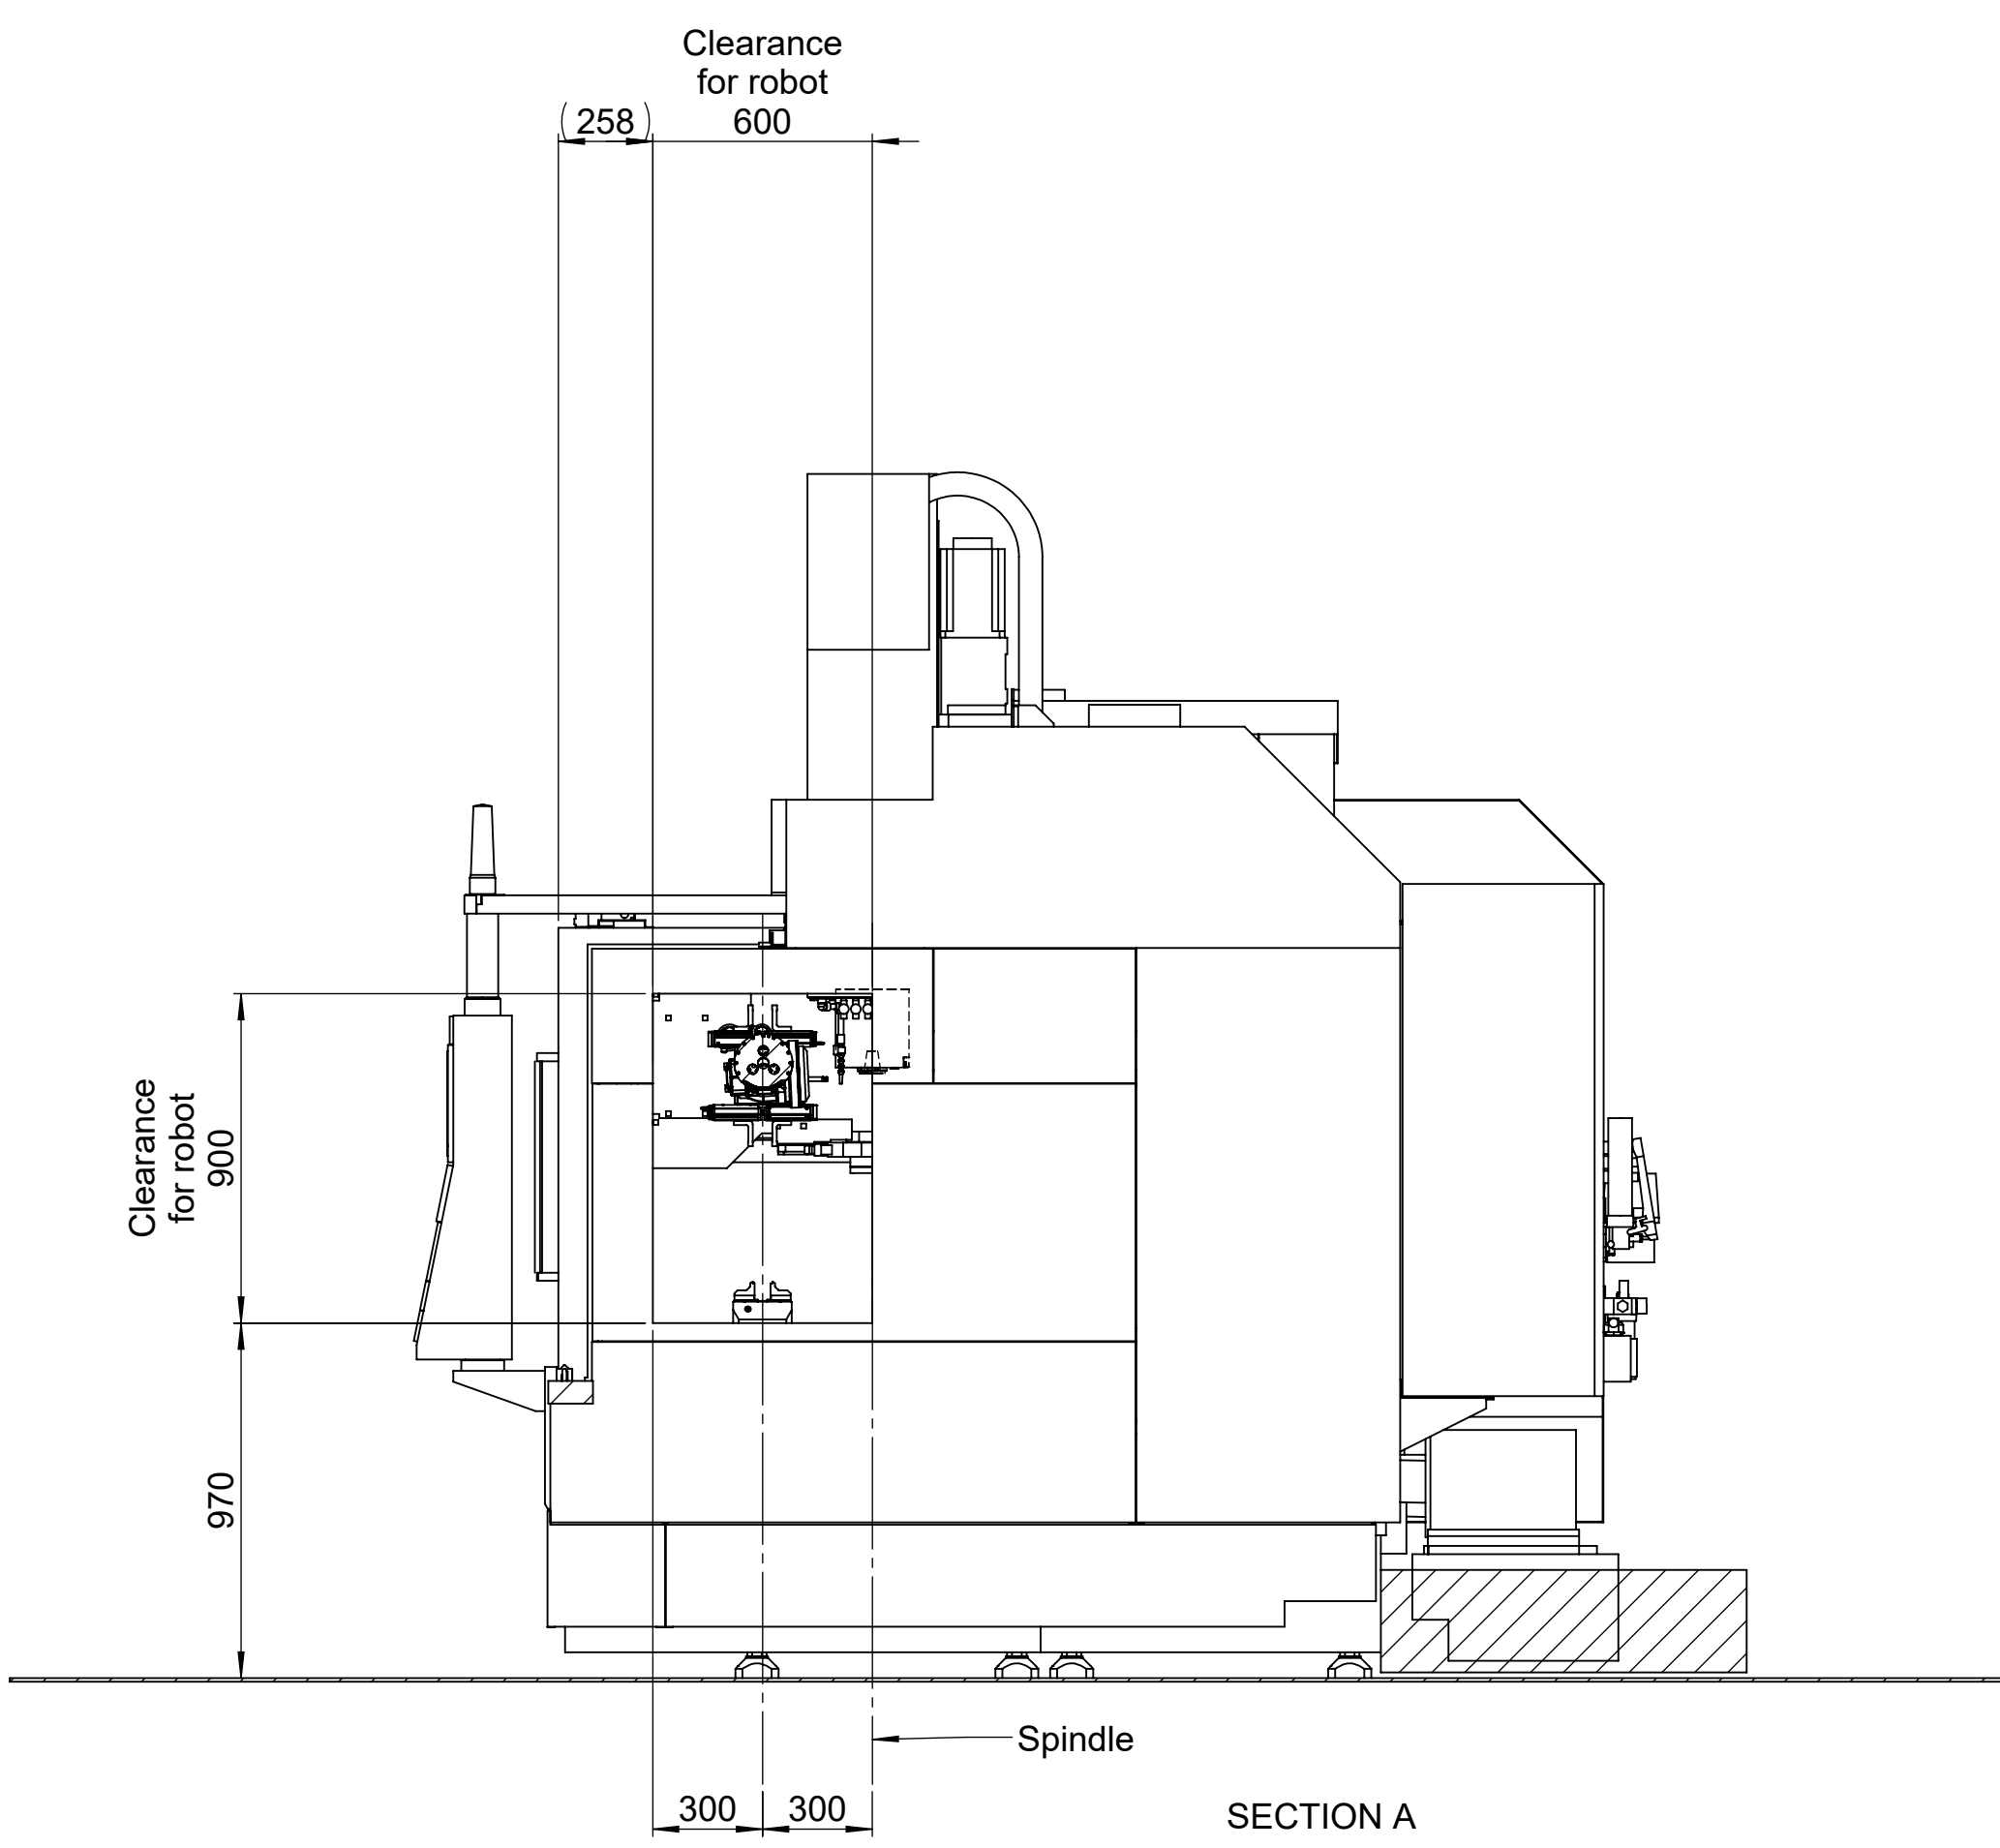
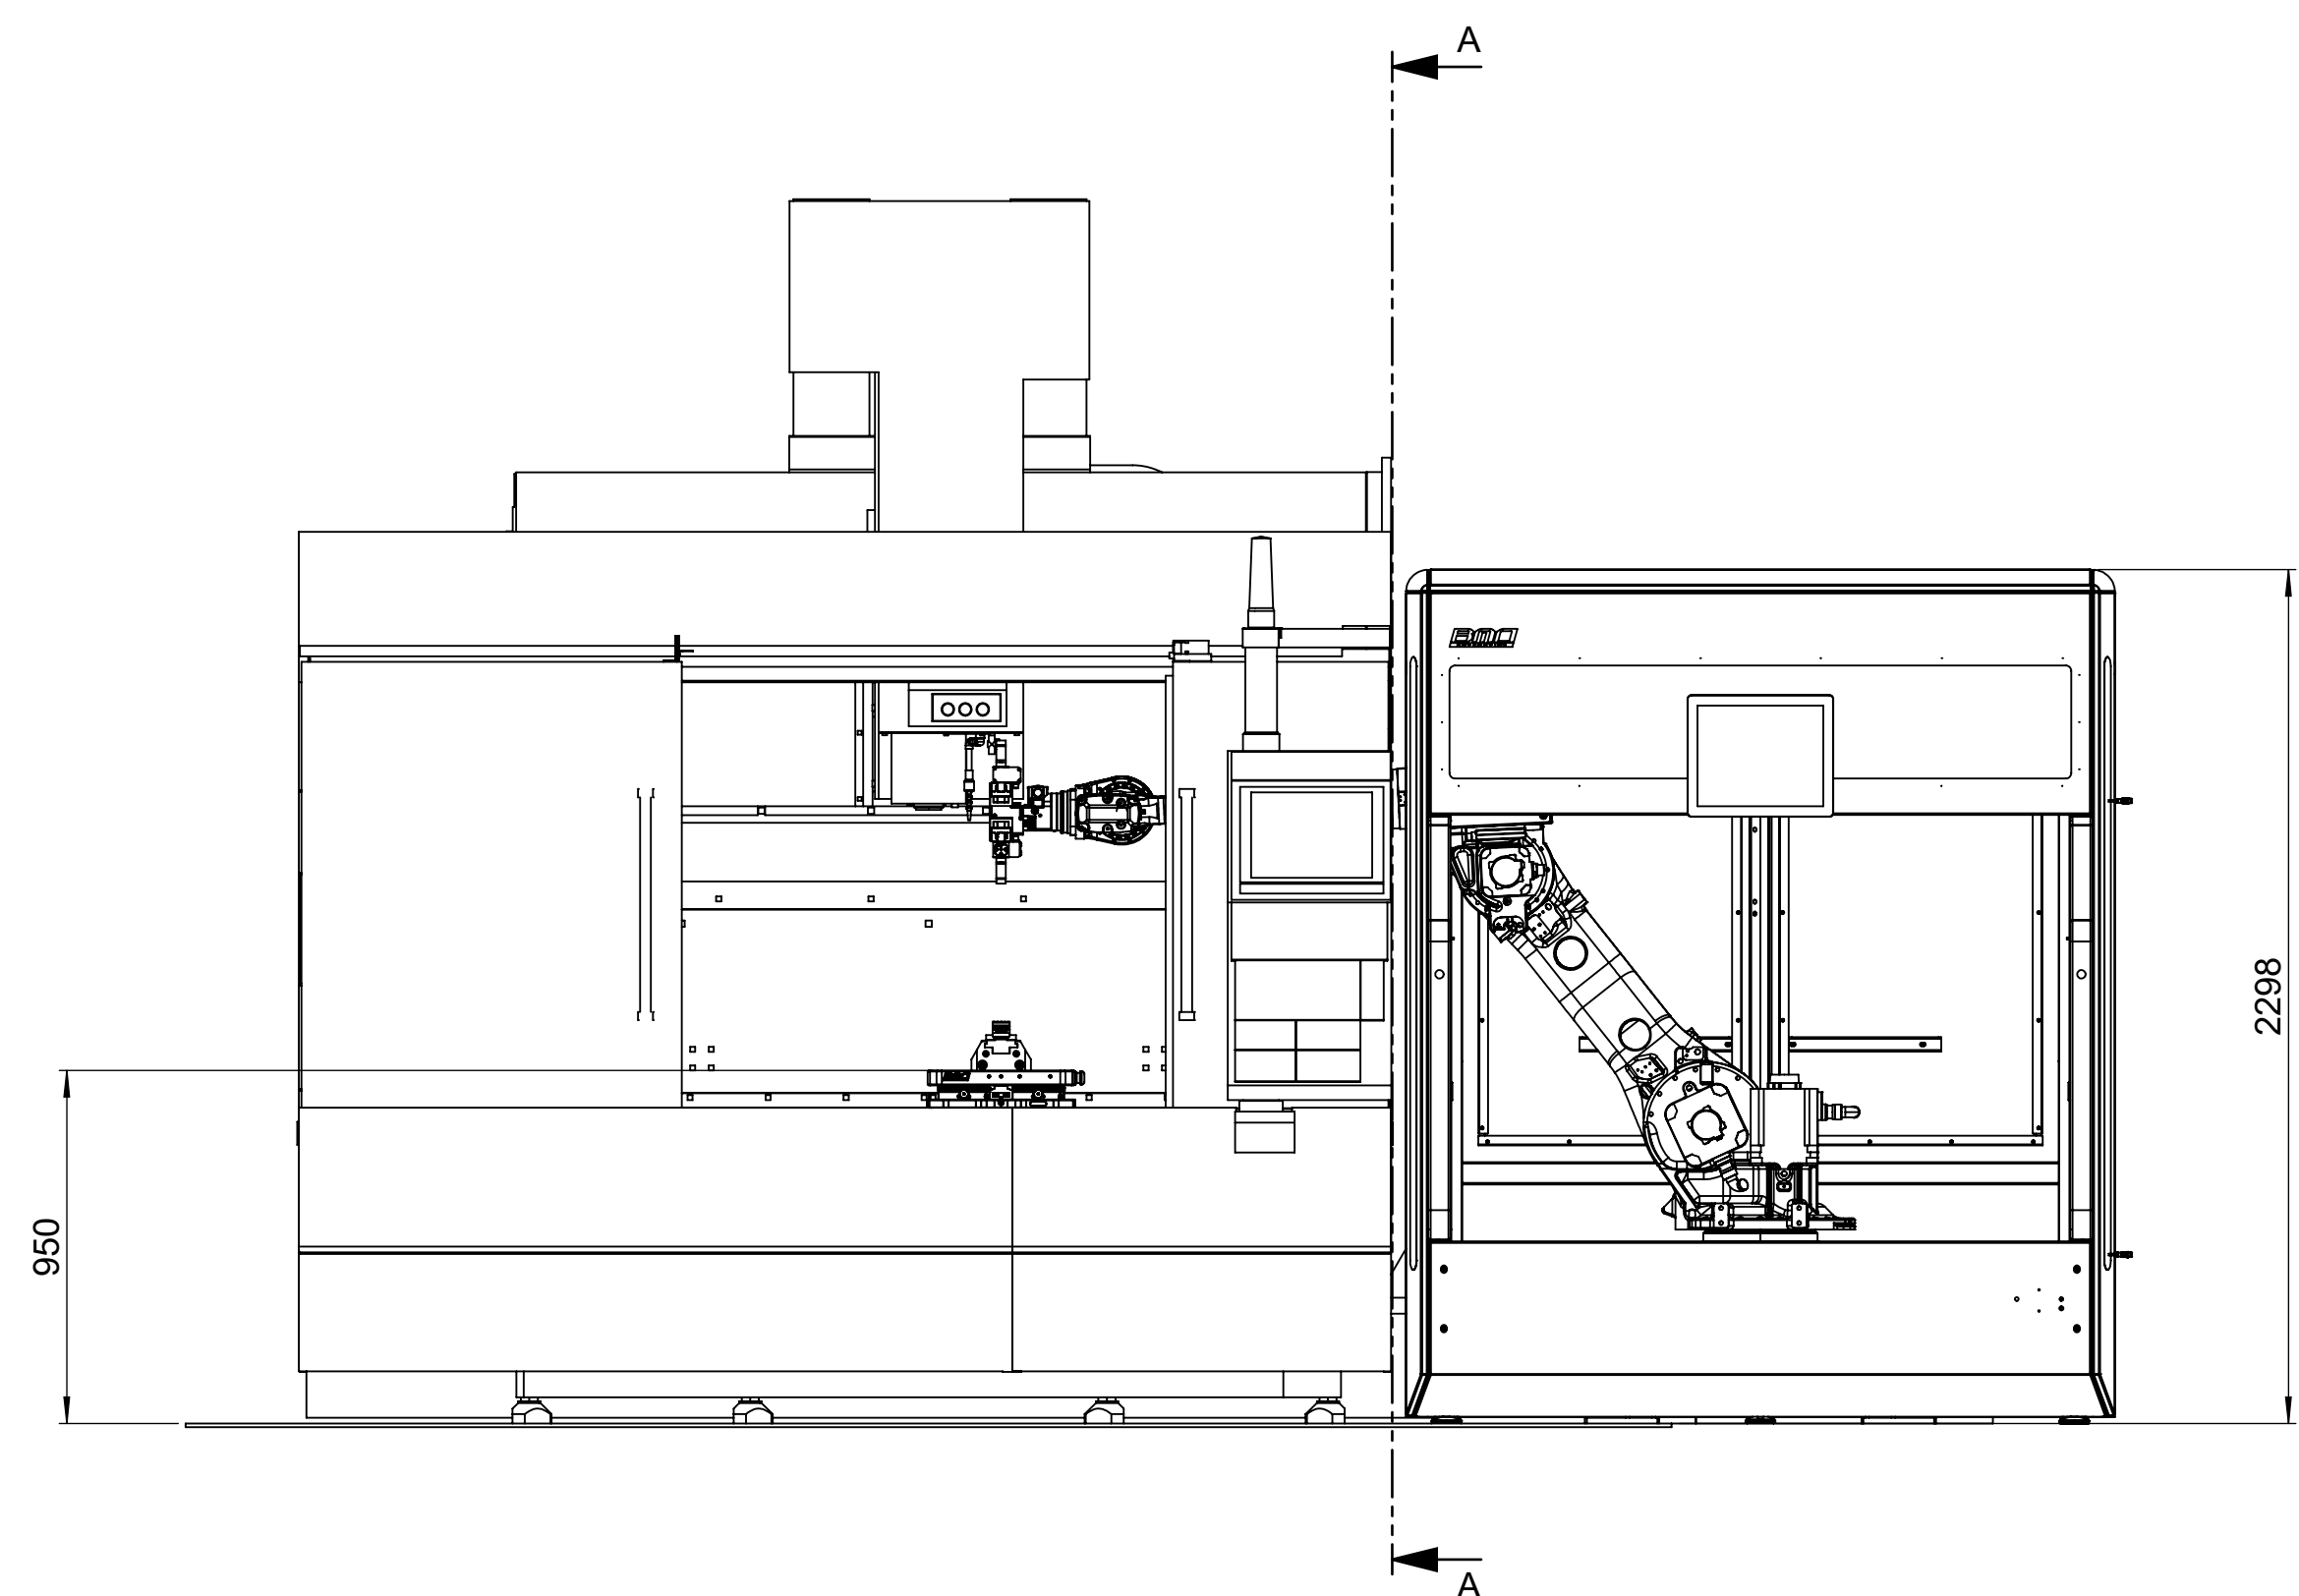


Position of the DX200 is advised, not required.
(When positioning the DX200 to an alternative position, the cable length has to be checked)

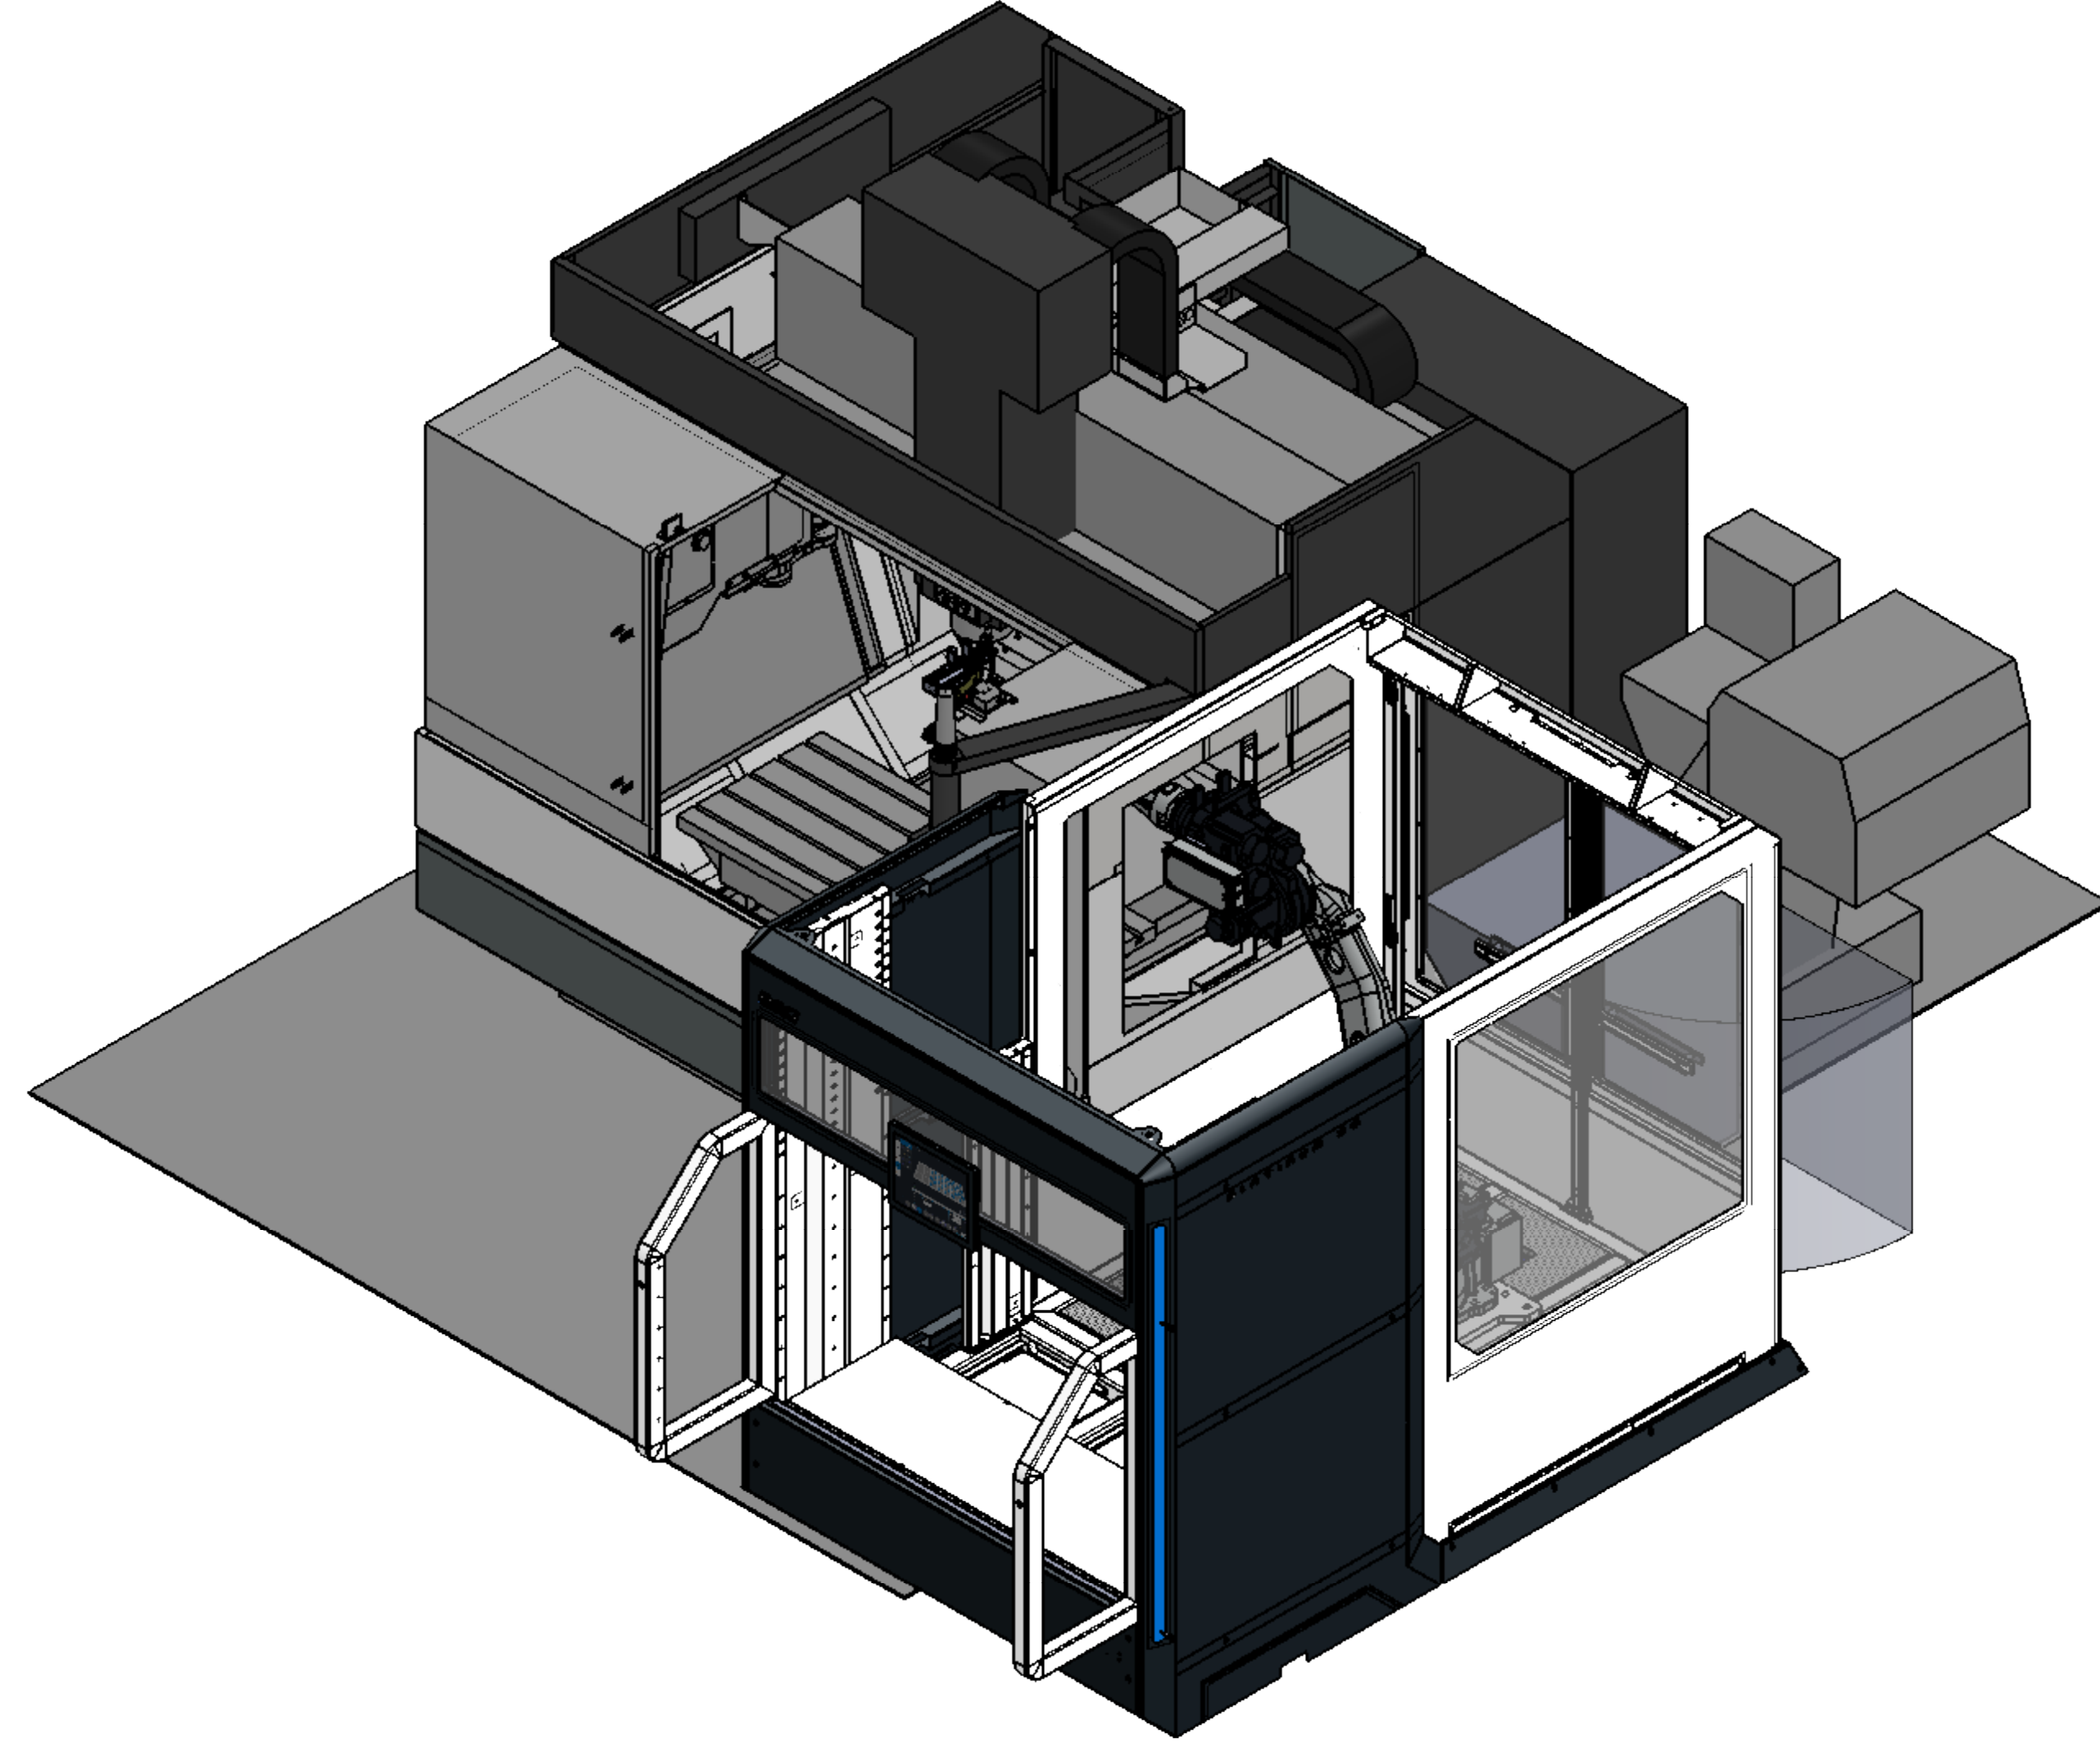

Required connections:

- 3x400V +N 32A-50Hz, with connector CEE-32A-5p.
- The maximum length of the main power cable from the DX200 controller is 5m.
- Required air supply is 7bar. One-touch fitting for tubing Ø8mm.
- Network cable length has to reach the DX200 controller with + 2m overlength.

Description: Pt50 - Okuma Genos M660V		Drawn: R.C.	Project:
Material: See monchs		Date: 10-10-2019	American projection
Treatment:		Scale: 1:20	Sheet No: 1/11
		Universal standards according to EN 12789-1 and EN 60204-1 Compliance according to EN 60204-1 and EN 60204-11 Compliance according to EN 60204-1 and EN 60204-11	100 2788-001 EN-602 1302 EN-ISO 1101
Pt50 - Okuma Genos M660V(MB-66VA)			Revision: A0